

Kestrel

Digital Scientific Frame Transfer EMCCD

128 x 128 • 24 μ m x 24 μ m pixels • Cooled to -20°C • 500 fps •



Key Features and Benefits

Ultra low noise readout with FAST speeds

- **Up to 500 frame per second**
High speed and super sensitivity
- **128 x 128 Back-thinned EMCCD sensor**
Enables optimum image resolution in low light imaging applications
- **16 bit Camera Link output**
Realtime imaging for low latency photon to digital image
- **Up to 95% QE from back-illuminated sensor**
Optimum Photon collection
- **Strong VIS and NIR reponse and ultrawide bandwidth**
From 350nm through to 1100nm

Resolution	128 x 128
Pixel Size	24μm x 24μm
Readout Noise	<1e
Frame Rate	Up to 500fps
Camera Link	16bit



www.raptorphotonics.com

Specification for Kestrel

Sensor Type	1/8" Back Thinned Frame Transfer EMCCD
Active Pixel	128 x 128
Pixel Size	24µm x 24µm
Active Area	3.1mm x 3.1mm
Full Well Capacity	100ke-
Non-linearity	<1%
Readout Noise (RMS)	EM Gain ON: <1e- EM Gain OFF: <290e-
Full Resolution Frame Rate	500fps
Dark Current (e/p/s)	<1 @ -20°C
Digital Output Format	16 bit Camera Link (base configuration)
Peak Quantum Efficiency	95%
Spectral Response	350 - 1100nm
TE Cooling	-20°C
Binning	1x1 up to 2x2
Lens Mount	C-Mount
Synchronisation	Trigger IN and OUT - TTL compatible
Power Supply	12V DC ±10%
Total Power Consumption	<80W
Operating Case Temperature ¹	-20°C to +55°C
Storage Temperature	-30°C to +60°C
Dimensions (L*W*H) ²	121mm x 140mm x 113mm
Weight (no lens)	< 1.5kg

Raptor Photonics Limited reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.

Ordering Information

Camera

Kestrel EMCCD digital camera	KE60V-BV-CL
Power Supply Unit	RPL-HR4-K

Optional Accessories

Mini PC with XCAP STD and frame grabber	RPL-PC-mf2280
Thunderbolt frame grabber	RPL-mf2280
EPIX® EB1 base CL card	RPL-EPIX-EB1
EPIX® XCAP STD software	RPL-XCAP-STD
MDR-SDR Camera Link Cable, 2m ³	RPL-MCL-CBL-2M
Thermoelectric Water Chiller Unit	RPL-CHILLER
Chiller Tubing	RPL-WTUBE-NINOX
Optical Lenses ⁴	RPL-xx-xxxx

Note 1: Extended operating temperature range on request.

Note 2: Dimensions include all connector parts on camera interface


Note 3: Longer CL cable available up to 25M

Note 4: Please consult us to check our range of lenses

Demo is available on request.
Pricing AOR subject to volumes.

Detailed technical drawings
can be downloaded at
www.raptorphotonics.com

Quantum Efficiency

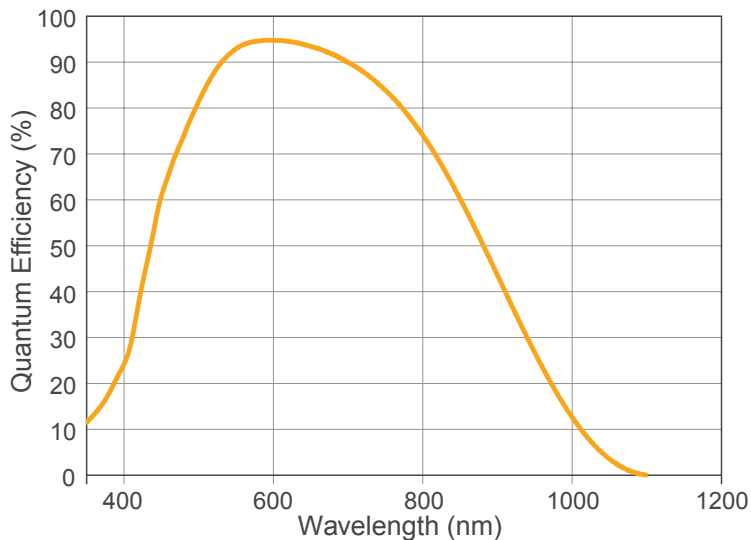

*Data supplied by sensor manufacturer

Applications

- Adaptive Optics and Astronomy
- Calcium signaling
- High resolution fluorescence imaging
- Hyperspectral imaging
- X-ray & High energy
- Particle Image Velocimetry
- High speed object tracking

Document #: USKE60V-BV-CL 0322



Willowbank Business Park
Larne, Co Antrim
BT40 2SF,
Northern Ireland

Raptor Photonics Ltd. (UK)
T: +44(0)2828 270 141
E: sales@raptorphotonics.com
www.raptorphotonics.com

Raptor Photonics Inc. (USA)
T: +1 (877) 230-4836
E: sales@raptorphotonics.com
www.raptorphotonics.com

